-- acumed[®] NanoPhix[™] Cannulated Lag Screw

Cannulated, 1.5 mm diameter design allows simple and precise fixation of small fracture fragments such as avulsion and condylar fractures

> Specifically sized for small fracture fragments to facilitate early, active mobilization for accelerated healing and faster return to daily activities

Innovative dual-diameter guide wire

eliminates the need for drilling, simplifying a more precise implant placement



A New Standard for Fracture Fragment Fixation

NanoPhix Cannulated Lag Screw

The NanoPhix cannulated lag screw system features 1.5 mm diameter implants and an innovative dual diameter guide wire that simplifies implant placement.



Comprehensive System

The system consists of 21 implants from 6–26 mm in 1 mm increments, 2 dualdiameter guide wires, a depth gauge with a countersink tip, and a 1/16" hex driver. Implants and instruments come sterile packed.

- NanoPhix major and minor diameter: 1.5 mm/1.2 mm
- NanoPhix head diameter: 2.5 mm
- Guide wire length and diameters: (trailing) 75 mm length x .6 mm dia. and (leading) 106 mm length x 1.3 mm dia.








View More X-rays

go.acumed.net/NanoPhix-Xrays

System Features



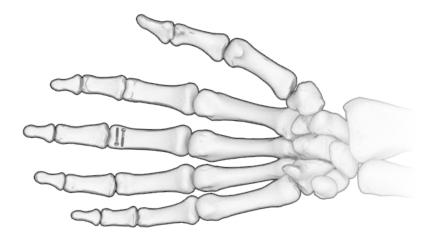

Visit: go.acumed.net/NanoPhix to Explore NanoPhix and CPT Codes





www.acumed.net

Acumed Oregon Campus 5885 NE Cornelius Pass Road Hillsboro, OR 97124 +1.888.627.9957 Acumed Texas Campus 3885 Arapaho Road Addison, TX 75001 +1.800.456.7779 Acumed Iberica Campus C. de Álvaro Caballero, 14, 28023 Madrid, Spain +34.913.51.63.57

SPF10-28-A | Effective: 2024/11 | © 2024 Acumed® LLC

ExsoMed[®] Corporation is a wholly owned subsidiary of Acumed LLC. Acumed[®] and NanoPhix[®] are registered trademarks of Acumed LLC.